FOCUS-LIGHTING

Sticks 900

Design: schmidt hammer lassen design




Simplicity by design is the principle behind **Sticks 900** created by schmidt hammer lassen. The lines of the black or grey-enamelled aluminium housing are continued in single or double light slots in opalised acrylic glass. At daylight, **Sticks** is simply part of the environment; at night, light predominates and the surroundings step into character.

Sticks 900 is available with base for embedment or flanged base for mounting on solid ground. Available with LED.



Sticks 900 - LED

Design: schmidt hammer lassen design

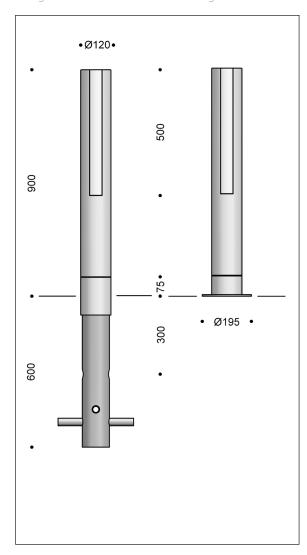

Luminaire specification:

Material: Aluminium

Coating: Graphite grey: YW355F

Black: RAL 9005, SN805G Black: Noir 900 Sablé SN351F

Corten brown: YX355F

Light slots: Acrylic glas, opalised, single og double sided

Mounting: With rooted or flanged base Connection: max two cables, 5 x 6 mm²

Driver and 4A fuse in the base

Classification: IP55 , class II Impact resistance: IK08 Weight: 15.5 kg

LED specification:

LED type: Citizen Array CALD0414-M8L1

Energy consumption:

Single light slit: 8 or 11 W Double light slit: 15 or 20 W

Operational life: min 50,000 hours at ta max 25°C Colour temperature: 2700, 3000, or 4000 Kelvin

Energy eff. class: E
Colour rendering: min 80 Ra
Colour accuracy: 3 Steps SDCM

Driver: LED driver, dimming optional

Operational life: min 50,000 hours

Product codes:

Sticks 900, LED, single light slot									
Item No.	Mou	Mounting				Lamp type			
7840-	root	rooted base				Citizen Array, 8 W (500 mA)			
7846-	fland	flanged base				Citizen Array, 8 W (500 mA)			
7843-	root	rooted base				Citizen Array, 11 W (700 mA)			
7848-	flang	flanged base				Citizen Array, 11 W (700 mA)			
Sticks 900, LED, double lig	ht slot								
7841-	root	rooted base				2 x Citizen Array, 15 W (500 mA)			
7847-	fland	flanged base				2 x Citizen Array, 15 W (500 mA)			
7850-	root	rooted base				2 x Citizen Array, 20 W (700 mA)			
7849-	flang	flanged base				2 x Citizen Array, 20 W (700 mA)			
	Selec	Select colour, colour temperature, etc. in the table below.							
To be combined with:	Colo	Colour		Colour temperatur		Dimming		Protection class	
	3	black RAL 9005	827	2700 K, 80 Ra	empty	no dimming	empty	class II	
	4	graphite grey	830	3000 K, 80 Ra	٧	1-10 V	J	class I	
	9	silver grey	840	4000 K, 80 Ra	D	Dali			
	17	corten brown							
	66	black noir 900							

Example product code:	7840-66830 = Sticks 900 single light slot, rooted base, 8 W LED, black noir 900, 3000 K 80 Ra, no dimming