

# Pelée Pendant

Design: Cubo Architects



The Pelée family consists of recessed, surface- or wall-mounted, suspended, and downlight luminaires.

The upright feature of the pendant is optional.

The inner conical steps, characteristic for all Pelée luminaires, contribute to a comfortable, non-glaring spread of light.

**Dimensions, pendants:**

Diameter: 385 mm


**Lamp type:**

LED, exchangeable



# Pelée Pendant

Design: Cubo Architects

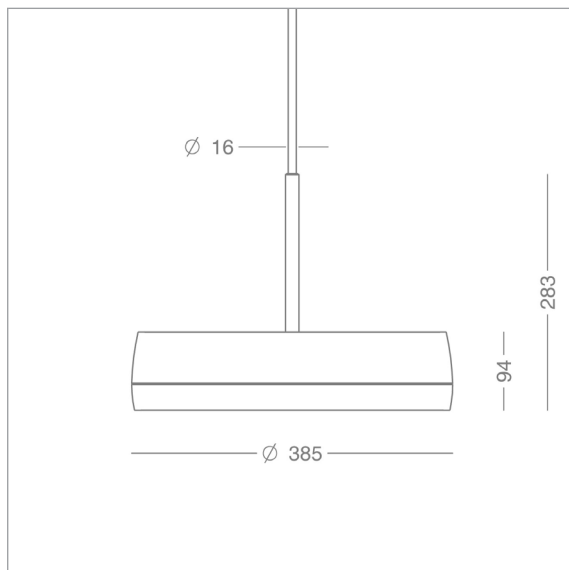

## Luminaire specification

Material:	cast aluminium, powder coated white RAL 9010 Textura black Noir 900 Sablé SN351F alu-grey RAL 9006 Textura corten brown YX355F
Shade:	opal-white acrylate, PMMA
Lead:	3 m white or black PKAJ
Classification:	IP20, class I
Weight:	3.6 kg
Lamp type:	LED, exchangeable

## LED and driver specification

LED:	324 mm board
Uplight:	3 curved strips
Total consumption:	17, 23, or 33 W (downwards) 22, 30, or 40 W (up and down)
Operational service:	min 50,000 hours at ta 25°C L80B10
Colour temperature:	2700, 3000 or 4000 Kelvin alt. 2700-6500 K tunable
Energy classes:	2700 K: E 3000, 4000, 6500 K: D
Colour rendering:	min 90 Ra
Colour accuracy:	3 steps SDCM
Driver 17-30 W:	500-700 mA, dimming optional
Driver 33-40 W:	950-1050 mA, incl. Dali

## Product codes

PELÉE 385 pendant							
Item No.	Lamp type	Select colour, colour temperature, etc. in the table below.					
1840-	17 W LED, 500 mA						
1841-	23 W LED, 700 mA						
1844-	33 W LED, 1050 mA, incl. Dali						
PELÉE 385 pendant Uplight							
1842-	22 W LED, 500 mA						
1843-	30 W LED, 700 mA						
1845-	40 W LED, 950 mA, incl. Dali						
Combine with:	Colour	Shade options		Colour temperature		Dimming options	
	1 white	empty	acrylic, opalised	927	2700 K, 90 Ra	empty	no dimming
	9 alu-grey	M	acrylic, prismatic	930	3000 K, 90 Ra	D	Dali
	17 corten brown			940	4000 K, 90 Ra	V	1-10 V
	66 noir 900			9WD	TW, Dali, 90 Ra		
						Colour of lead	
						empty	white
						Y	black
Example Item No.	1840-1927D = Pelée 385 pendant, 17 W, white, 2700 K 90 Ra, Dali dimming						

Find our sales partner in your country under Contacts at [www.focus-lighting.dk](http://www.focus-lighting.dk)